


# PERFORMANCE PLUS

# 3"

**METALLIC** Dimensions in inches and (mm). Ports shown facing front for dimensional purposes.

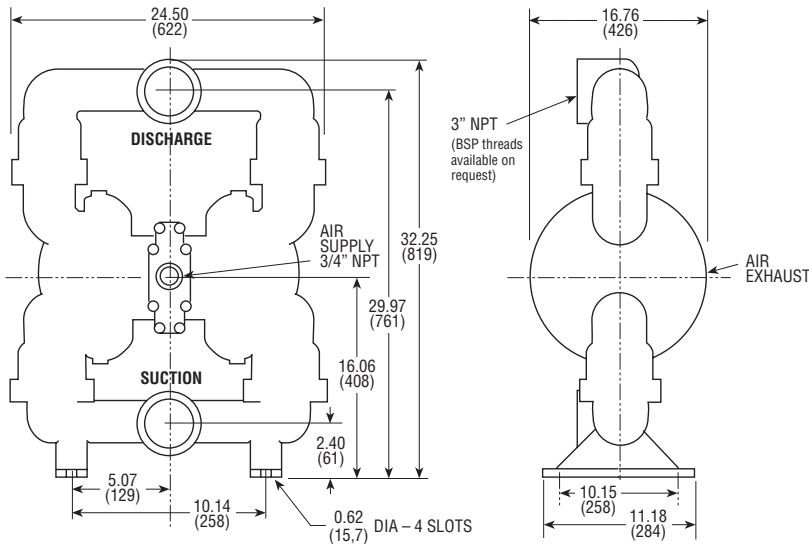



### METALLIC MODELS:

- AL-30** (Aluminum/Urethane/Geolast®) 130 lbs. (59 kg.)
- AL-30E** (Aluminum/Santoprene®/EPDM) 130 lbs. (59 kg.)
- AL-30T** (Aluminum/PTFE) 130 lbs. (59 kg.)
- AL-30V** (Aluminum/Viton®) 130 lbs. (59 kg.)

### SPECIFICATIONS:

- Capacity:  
Adjustable . . . . . 0 to 255 GPM (965 liters/min.)
- Maximum Temperature:  
All Models . . . . . 200°F (93°C)
- Maximum Air Pressure:  
All Models . . . . . 120 PSI (8,2 bar)
- Minimum Air Pressure:  
All Models . . . . . 20 PSI (1,3 bar)
- Dry Lift:  
Models w/PTFE balls . . . . . 10 ft. (3 meters)  
Other Models . . . . . 15 ft. (4,5 meters)
- Maximum Solids: . . . . . 7/16" (11,1 mm)
- Air Supply:  
Inlet . . . . . 3/4" NPT/BSP Female  
Outlet . . . . . 3/4" NPT/BSP Female  
• Muffler supplied
- Fluid Inlet/Discharge:  
Metallic Models . . . . . 3" NPT Female  
• For optional BSP threads add -P15 to Model No.

### PERFORMANCE CURVE (Based on water-flooded suction)

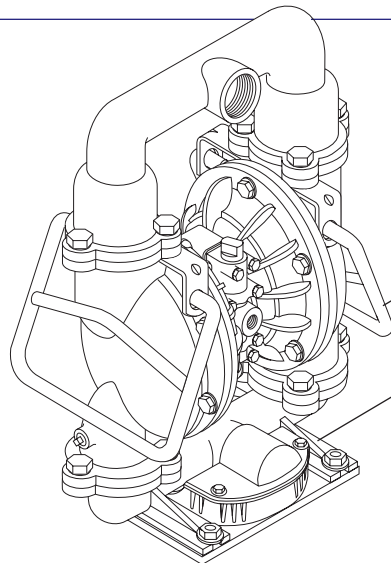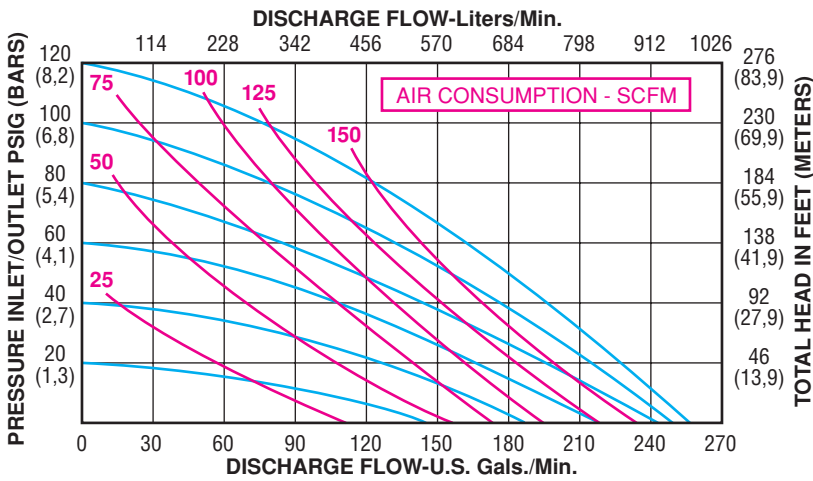

### Optional 3" Pump Accessories

- **Carry Handles**  
Part No. 52000  
(Kit contains 2 handles)
- **Strainer Base**  
Part No. 53000